

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 May 2006 (11.05.2006)

PCT

(10) International Publication Number
WO 2006/049325 A1

(51) International Patent Classification:
G03G 15/00 (2006.01) **G03G 21/18** (2006.01)

(21) International Application Number:
PCT/JP2005/020667

(22) International Filing Date:
4 November 2005 (04.11.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004-322260 5 November 2004 (05.11.2004) JP

(71) Applicant (for all designated States except US): **CANON KABUSHIKI KAISHA** [JP/JP]; 30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo 146-8501 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **KAWASUMI, Ry-
oichi** [JP/JP]; 1101-1-1-1106, Nonoi, Toride-shi, Ibaraki
302-0032 (JP).


(74) Agent: **YAMADA, Ryuichi**; Toko International Patent Of-
fice, Hasegawa Bldg. 4F, 7-7, Toranomom 3-chome, Mi-
nato-ku, Tokyo 105-0001 (JP).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY,
MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO,
NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK,
SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT,

[Continued on next page]

(54) Title: PROCESS CARTRIDGE AND IMAGE FORMING APPARATUS

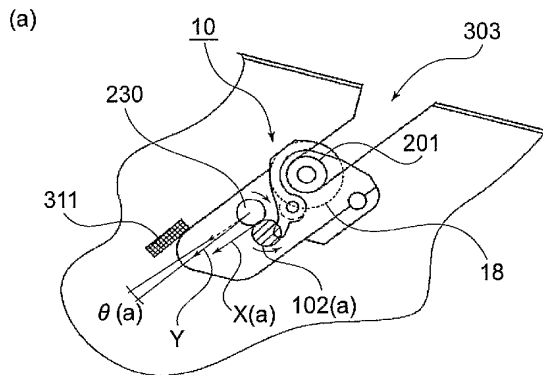

(57) Abstract: A process cartridge detachably mountable to a main assembly of the image forming apparatus, the process cartridge includes an image bearing member ; a developing device ; an image bearing member driving force input portion ; a developing device driving force input portion wherein the image bearing member driving force output portion of the main assembly and the image bearing member driving force input portion are engaged with each other with a play in a mounting and demounting direction of the process cartridge, when the driving force is inputted from the image bearing member driving force output portion to the image bearing member driving force input portion, and wherein when the driving force is inputted from the developing device driving force output portion of the main assembly to the developing device driving force input portion, a part of the process cartridge is urged toward a positioning portion for positioning of the process cartridge relative to the main assembly.

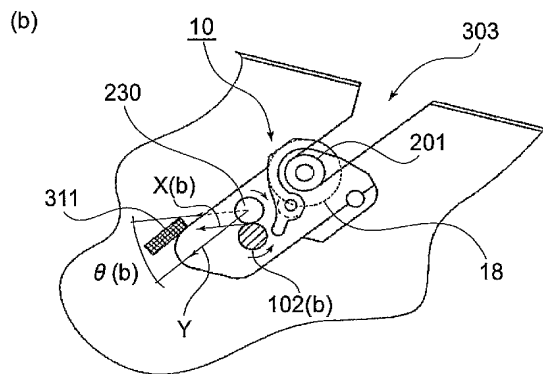

WO 2006/049325 A1



RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*